

Electric Underfloor Heating Thermostat

Ⓜ <http://www.beok-controls.com/>

✉ shine.wang@beok-controls.com

📍 Room.301-302,Block A,No.5 Shenwang Road,Minhang District,Shanghai,China



CONTENT

WIFI ELECTRIC UNDERFLOOR HEATING THERMOSTAT


TCB38-WIFI-EP	4
TCW38-WIFI-EP	4
TGT79-WIFI-EP	4
TDS75-WIFI-EP	5
TDS72-WIFI-EP	5
TGM50-WIFI-EP	5
TGM50B-WIFI-EP	6
TGP508-WIFI-EP	6
TS4G-WIFI-EP	6
TS4W-WIFI-EP	7
TDR89W-WIFI-EP	7
TDR89B-WIFI-EP	7
TGW60W-WIFI-EP	8
TGW60B-WIFI-EP	8
TGR85-WIFI-EP	8
TGR86-WIFI-EP	9
TDR83-WIFI-EP	9
TGP53-WIFI-EP	9
TOL47-WIFI-EP	10
TCR7-WIFI-EP	10
TCR8-WIFI-EP	10
TR9B-WIFI-EP	11
TR9HB-WIFI-EP	11
TR8B-WIFI-EP	11
TR33-WIFI-EP	12
TGT70-WIFI-EP	12
TDS21-WIFI-EP	12
TDS23-WIFI-EP	13
TGP51-WIFI-EP	13
TOL313-WIFI-EP	13

NON-WIFI ELECTRIC UNDERFLOOR HEATING THERMOSTAT


TCB38-EP	14
TCW38-EP	14
TGT79-EP	14
TDS75-EP	15

TDS72-EP	15
TGM50-EP	15
TGP508-EP	16
TS4G-EP	16
TS4W-EP	16
TDR89W-EP	17
TDR89B-EP	17
TGW60W-EP	17
TGW60B-EP	18
TGR85-EP	18
TGR86-EP	18
TDR83-EP	19
TGP53-EP	19
TOL47-EP	19
TOL48-EP	20
TR9B-EP	20
TR8B-EP	20
TR33-EP	21
TGT70-EP	21
TDS21-EP	21
TDS23-EP	22
TGP51-EP	22
TOL313-EP	22
TOL35-EP	23
CERTIFICATES	24
FACTORY	25

WIFI ELECTRIC UNDERFLOOR HEATING THERMOSTAT

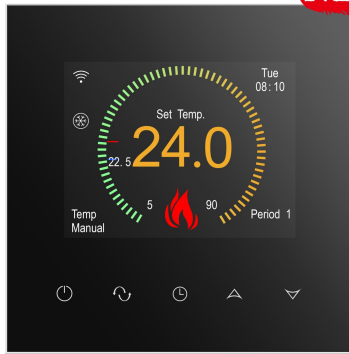


NEW




TCB38-WIFI-EP

Color screen/Black back light
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20
With multi-language

Wiring Diagram




NEW




TCW38-WIFI-EP

Color screen/16A (electric heating)
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20
With multi-language

Wiring Diagram




NEW



TGT79-WIFI-EP


Negative screen/Black back light
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20

Wiring Diagram







NEW



TDS75-WIFI-EP

Touch screen/White back light
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95℃
Temperature Accuracy: +/- 0.5℃
Ambient Temperature: -5~50℃
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20

Wiring Diagram

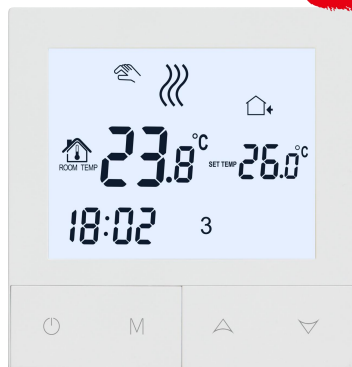


NEW




TDS72-WIFI-EP

Button type/White back light
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95℃
Temperature Accuracy: +/- 0.5℃
Ambient Temperature: -5~50℃
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20

Wiring Diagram




NEW



TGM50-WIFI-EP

Touch screen/White backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95℃
Temperature Accuracy: +/- 0.5℃
Ambient Temperature: -5~50℃
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness
With open window function

Wiring Diagram



NEW



works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TGM50B-WIFI-EP

Touch screen/White backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness
With open window function

Wiring Diagram



NEW



works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TGP508-WIFI-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram



NEW



works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice


TS4G-WIFI-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram



NEW



works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TS4W-WIFI-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram



works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TDR89W-WIFI-EP

Touch screen/White backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram



works with
Amazon Alexa



works with
Google Home





works with
Yandex Alice

TDR89B-WIFI-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram





works with
Amazon Alexa



works with
Google Home





works with
Yandex Alice

TGW60W-WIFI-EP

Touch screen/White backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95℃
Temperature Accuracy: +/- 0.5℃
Ambient Temperature: -5~50℃
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram



works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TGW60B-WIFI-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95℃
Temperature Accuracy: +/- 0.5℃
Ambient Temperature: -5~50℃
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram



works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TGR85-WIFI-EP

Mirror surface/Touch screen
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95℃
Temperature Accuracy: +/- 0.5℃
Ambient Temperature: -5~50℃
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram





works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TGR86-WIFI-EP

Round mirror screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram



works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TDR83-WIFI-EP

Round touch screen/White backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram



works with
Amazon Alexa



works with
Google Home





works with
Yandex Alice

TGP53-WIFI-EP

Button type/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram





works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TOL47-WIFI-EP

Button type/White backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: $\pm 0.5^{\circ}\text{C}$
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness

Wiring Diagram



works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TCR7-WIFI-EP

Button type/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC100~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: $\pm 0.5^{\circ}\text{C}$
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.25kg
Protection Level: IP20
With C and F degree display ways
With weather and humidity display
Adjustable screen brightness
With 4 languages for thermostat
With 11 languages for app

Wiring Diagram

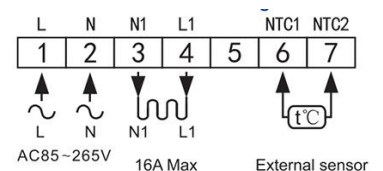

works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TCR8-WIFI-EP

Touch key/Black back light
Current Loading: 16A (electric heating)
Supply Voltage: AC100~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: $\pm 0.5^{\circ}\text{C}$
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.25kg
Protection Level: IP20
With C and F degree display ways
With weather and humidity display
Adjustable screen brightness
With 4 languages for thermostat
With 11 languages for app

Wiring Diagram

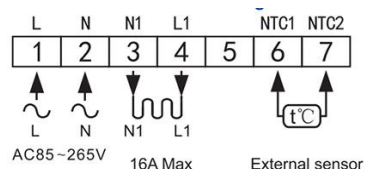




TR9B-WIFI-EP

Touch key/Black backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC100~240V
 Temperature Setting range: 5~95°C
 Temperature Accuracy: +/- 0.5°C
 Ambient Temperature: -5~50°C
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.25kg
 Protection Level: IP20
 With C and F degree display ways
 With humidity and weather display
 With one-touch ECO mode
 With 11 languages for app


Wiring Diagram

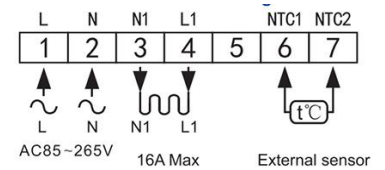

TR9HB-WIFI-EP

Touch key/Black backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC100~240V
 Temperature Setting range: 5~95°C
 Temperature Accuracy: +/- 0.5°C
 Ambient Temperature: -5~50°C
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.25kg
 Protection Level: IP20
 With C and F degree display ways
 With humidity and weather display
 With one-touch ECO mode
 With 11 languages for app


Wiring Diagram

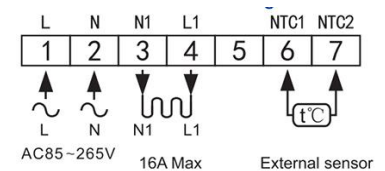


TR8B-WIFI-EP

Touch key/Black backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC100~240V
 Temperature Setting range: 5~95°C
 Temperature Accuracy: +/- 0.5°C
 Ambient Temperature: -5~50°C
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.25kg
 Protection Level: IP20
 With C and F degree display ways
 With humidity and weather display
 With one-touch ECO mode
 With 11 languages for app

Wiring Diagram

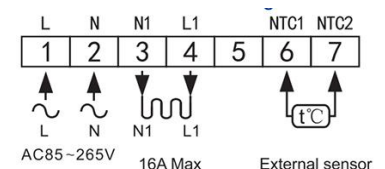

NEW

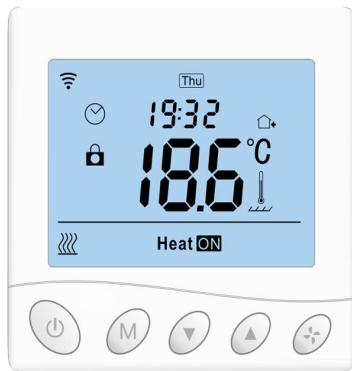

works with
Amazon Alexa



works with
Google Home




works with
Yandex Alice

TR33-WIFI-EP

Button type/White backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC100~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.25kg
Protection Level: IP20
With C and F degree display ways
With humidity and weather display
With one-touch ECO mode
With 11 languages for app

Wiring Diagram

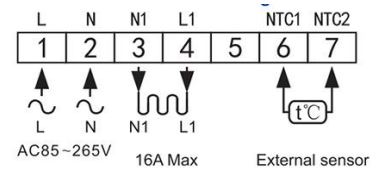

works with
Amazon Alexa




works with
Google Home

TGT70-WIFI-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.35kg
Protection Level: IP20
With 9 languages for app

Wiring Diagram



works with
Amazon Alexa





works with
Google Home

TDS21-WIFI-EP

Touch Screen/White or blue backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.35kg
Protection Level: IP20
With 9 languages for app

Wiring Diagram








TDS23-WIFI-EP

Touch screen/White or blue backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.35kg
Protection Level: IP20
With 9 languages for app


Wiring Diagram



TGP51-WIFI-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.35kg
Protection Level: IP20
With 9 languages for app


Wiring Diagram



TOL313-WIFI-EP

Button type/White or blue backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.35kg
Protection Level: IP20
With 9 languages for app

Wiring Diagram



NON-WIFI UNDERFLOOR HEATING THERMOSTAT


NEW



TCB38-EP

Color screen/Black back light
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20
With multi-language

Wiring Diagram




NEW



TCW38-EP

Color screen/White back light
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20
With multi-language

Wiring Diagram




NEW



TGT79-EP

Negative screen/Black back light
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20

Wiring Diagram




NEW




TDS75-EP

Touch screen/White back light
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20

Wiring Diagram




NEW

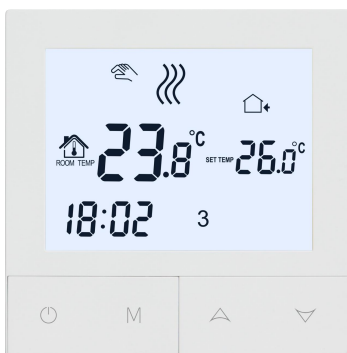

TDS72-EP

Button type/White back light
Current Loading: 16A (electric heating)
Supply Voltage: AC200~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.30kg
Protection Level: IP20

Wiring Diagram




NEW



TGM50-EP

Touch screen/White backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC110~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*45mm
Weight: 0.25kg
Protection Level: IP20
With adjustable brightness
With open window function

Wiring Diagram




NEW




TGP508-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20

Wiring Diagram




NEW

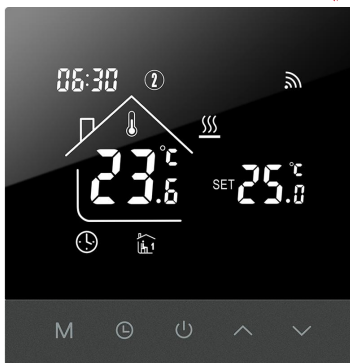


TS4G-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20

Wiring Diagram




NEW

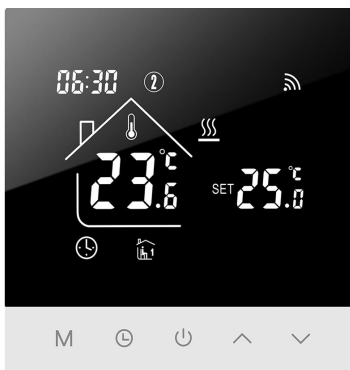

TS4W-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95°C
Temperature Accuracy: +/- 0.5°C
Ambient Temperature: -5~50°C
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20

Wiring Diagram






TDR89W-EP

Touch screen/White backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC95~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*42mm
 Weight: 0.25kg
 Protection Level: IP20


Wiring Diagram



TDR89B-EP

Touch screen/Black backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC95~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*42mm
 Weight: 0.25kg
 Protection Level: IP20


Wiring Diagram



TGW60W-EP

Touch screen/White backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC95~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*42mm
 Weight: 0.25kg
 Protection Level: IP20

Wiring Diagram






TGW60B-EP

Touch screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95℃
Temperature Accuracy: +/- 0.5℃
Ambient Temperature: -5~50℃
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20


Wiring Diagram



TGR85-EP

Mirror surface/Touch screen
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95℃
Temperature Accuracy: +/- 0.5℃
Ambient Temperature: -5~50℃
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20


Wiring Diagram



TGR86-EP

Round mirror screen/Black backlight
Current Loading: 16A (electric heating)
Supply Voltage: AC95~240V
Temperature Setting range: 5~95℃
Temperature Accuracy: +/- 0.5℃
Ambient Temperature: -5~50℃
Dimension(L/H/W): 86*86*42mm
Weight: 0.25kg
Protection Level: IP20

Wiring Diagram






TDR83-EP

Round touch screen/White backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC95~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*42mm
 Weight: 0.25kg
 Protection Level: IP20



Wiring Diagram



TGP53-EP

Button type/Black backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC95~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*42mm
 Weight: 0.25kg
 Protection Level: IP20


Wiring Diagram



TOL47-EP

Button type/White backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC95~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.25kg
 Protection Level: IP20

Wiring Diagram






TOL48-EP

Button type/White backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC95~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.25kg
 Protection Level: IP20


Wiring Diagram



TR9B-EP

Touch key/Black backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC100~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.25kg
 Protection Level: IP20
 With C and F degree display ways
 With one-touch ECO mode


Wiring Diagram




TR8B-EP

Touch key/Black backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC100~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.25kg
 Protection Level: IP20
 With C and F degree display ways
 With one-touch ECO mode

Wiring Diagram




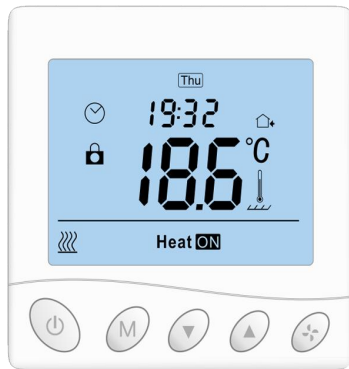

TR33-EP

Button type/White backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC100~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.25kg
 Protection Level: IP20
 With C and F degree display ways
 With one-touch ECO mode



Wiring Diagram



TGT70-EP

Touch screen/Black backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC200~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.35kg
 Protection Level: IP20


Wiring Diagram

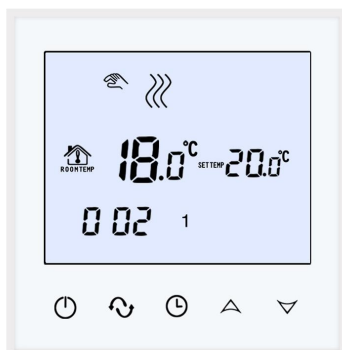

TDS21-EP

Touch Screen/White or blue backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC200~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.35kg
 Protection Level: IP20

Wiring Diagram







TDS23-EP

Touch screen/White or blue backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC200~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.35kg
 Protection Level: IP20


Wiring Diagram



TGP51-EP

Touch screen/Black backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC200~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.35kg
 Protection Level: IP20


Wiring Diagram



TOL313-EP

Button type/White or blue backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC200~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.35kg
 Protection Level: IP20

Wiring Diagram






TOL35-EP

Button type/White or blue backlight
 Current Loading: 16A (electric heating)
 Supply Voltage: AC200~240V
 Temperature Setting range: 5~95℃
 Temperature Accuracy: +/- 0.5℃
 Ambient Temperature: -5~50℃
 Dimension(L/H/W): 86*86*45mm
 Weight: 0.35kg
 Protection Level: IP20

Wiring Diagram



CERTIFICATES

Certificates of Beok

ROHS



RED



CE-LVD



CE-EMC



FACTORY

Our Factory

